

# MARION COUNTY SURVEYOR'S OFFICE


## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR


SEC. 10 TWN. 15<sub>N</sub> RNG. 3<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 7-20-09  
Party Chief: Wilcoxen/Greene  
Crew: Finney  
Type of Marker: PK nail  
Method of Establishment: County: 2-10-1999  
IN S.P.C. E Zone, NAD 83  
Name: 15031005  
N: 500 836.772 2(m)  
E: 55 391.031 0(m)

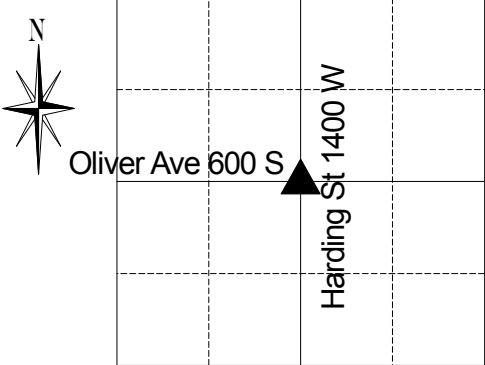

Gurney J. Bush Inc.

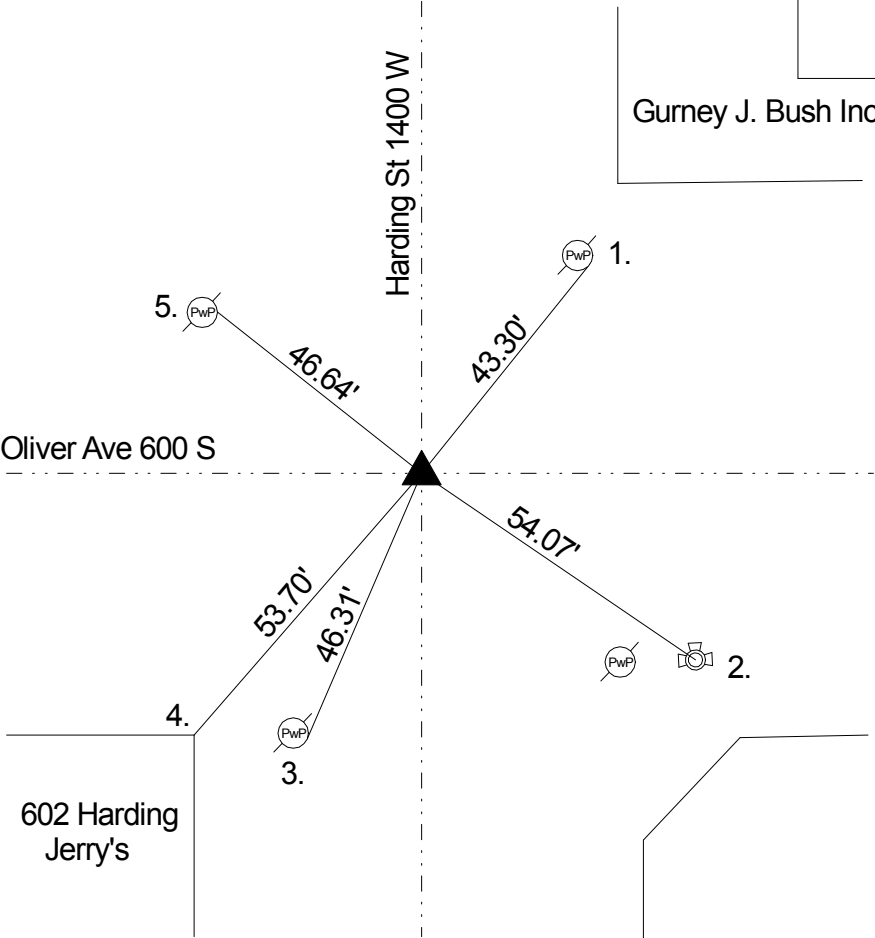

Sept-10th thru 17th - 1884 HB Fatout set rock and then set a flat rock with a cut “x” directly on top of previously set rock, as per pg 61 of the Surveyors Record Center Twp Marion County. 11-9-1993 A.B. Cleveland called corner a RR spike, established per Bock & Clark (job #08-0144-93) for Tennex Corp. per surveyors report. The uncertainty of this point is +/- 0.1' N-S & +/- 0.2' E-W, (see drawer 66, drawing 166). 2-10-1999 B. Wilcoxen called corner a PK nail and checked ties. 10-14-2004 B. Wilcoxen called a PK nail and retied. 7-20-09 Greene called a PK nail and retied.

REF.	DISTANCE	DESCRIPTION
1.	43.30'	Mag nail w/brass washer SE PwP no # 2" up
2.	54.07'	Top nut of fire hydrant
3.	46.31'	Mag nail w/brass washer SE light pole #212-562 A 2" up
4.	53.70'	NE corner of block building
5.	46.64'	Mag nail w/brass washer E PwP #104-532 B 5" up

THIS CORNER POSITION  
REPRESENTS A "TITLE" CORNER  
AND MAY NOT NECESSARILY  
REPRESENT THE POSITION BASED  
ON RECORD CORNERS.